




Suspension luminaire
Suspension for suspended ceiling
Aluminium and Polycarbonate

2700°K 24 VDC
CRI > 90

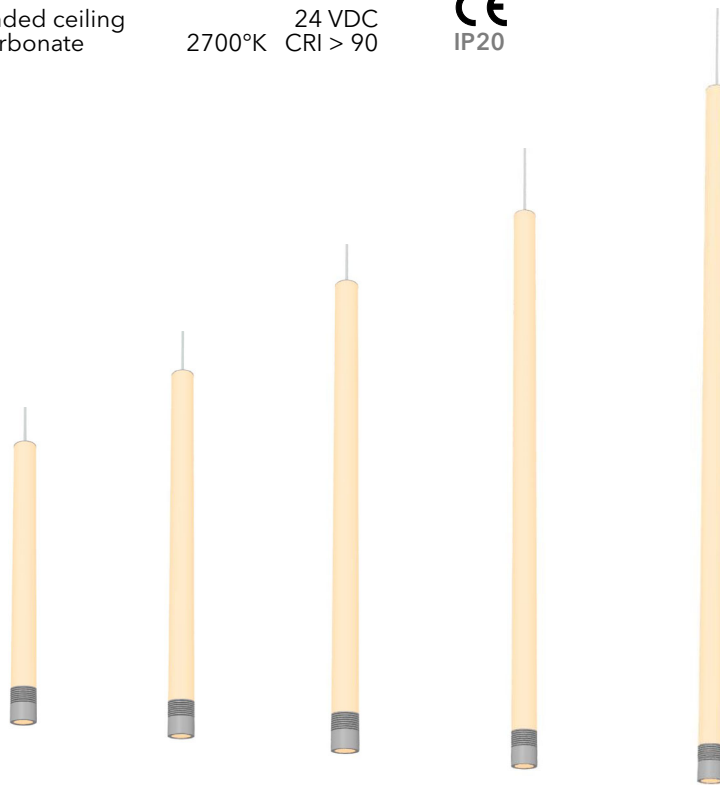

| | LED Watt | Luminous flux (lm) | Weight (kg) | Finish | Control |
|----------------|----------|--------------------|-------------|---|---------|
| Ø 40 x 520 mm | 12 | 1,120 | 0.4 | LR052 LR067 LR082 LR102 LR127 | |
| Ø 40 x 670 mm | 14.5 | 1,315 | 0.5 | | |
| Ø 40 x 820 mm | 17 | 1,515 | 0.6 | | |
| Ø 40 x 1020 mm | 20 | 1,780 | 0.7 | | |
| Ø 40 x 1270 mm | 24 | 2,115 | 0.9 | | |



Finish

| Gold | Matt Black | Natural Silver | |
|---|---|---|---|
|  G |  B |  S | Y |

| | | |
|-----------------------|----|----|
| Dimmable - w/o dimmer | 00 | ZZ |
| Simple remote | 10 | |
| DALI | 20 | |
| Push - dim | 25 | |
| CASAMBI | 60 | |
| TRIAC | 70 | |

Full model number



LRxxx - Y - ZZ